


G 511

DUCTILE IRON RESILIENT SEATED GATE VALVE PN16
 FLANGED END ACCORDING TO EN 1092-2 (DIN3254)
 NON RISING STEM
 DESIGNED AND MANUFACTURED ACCORDING
 TO EN1171 (DIN3352)
 DM174/2004 CERTIFIED FOR POTABLE WATER



www.ecivalve.it

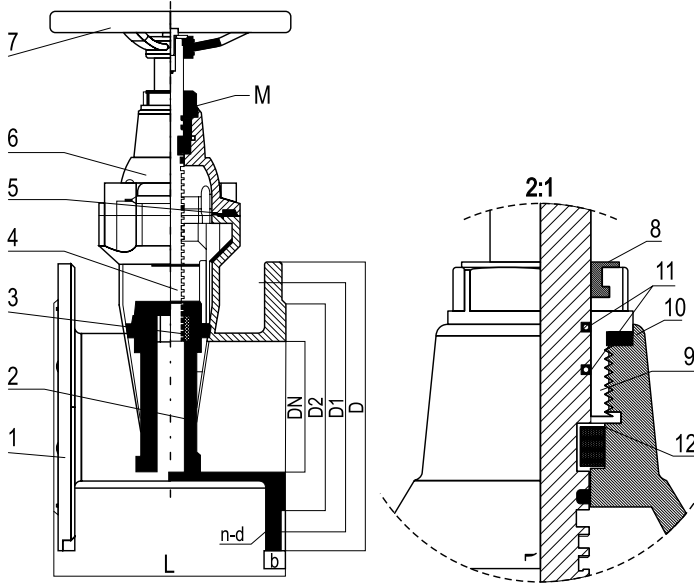

Specifications:

- DESIGNED AND MANUFACTURED ACCORDING TO EN1171 (DIN3352)
- BODY MATERIAL CONFORMS TO EN-GJS-500-10 (GGG50)
- FACE TO FACE ACCORDING TO EN558-1 SERIES 14 (EX DN3202 F4)
- FLANGED END ACCORDING TO EN 1092-2 (DIN3252)
- EPOXY COATED PAINT BLUE RAL5005 (MIN. 250 MM)
- WORKING PRESSURE: 16 BAR
- DM174/2004 CERTIFIED
- HYDRAULIC TEST PRESSURE: 17 BAR
- HYDRAULIC TEST ACCORDING TO BS EN 12266-1
- WORKING TEMPERATURE: -5°C + 80°C
- WORKING MEDIUM: WATER AND NON DANGEROUS LIQUIDS BELOW 0°C ONLY FOR WATER WITH ANTIFREEZE FLUIDS
- TESTED AND CONFORMS TO EN 1074-1/2

Dimensions (mm)

DN	INCH	L	D	D1	D2	b	n-d	WEIGHT KGS
50	2"	150	165	125	102	19	4-19	9.50
65	2.1/2"	170	185	145	122	19	4-19	12.50
80	3"	180	200	160	132	19	8-19	15.50
100	4"	190	220	180	156	19	8-19	17.80
125	5"	200	250	210	184	19	8-19	31
150	6"	210	285	240	211	19	8-23	33
200	8"	230	340	295	266	20	12-23	49
250	10"	250	405	355	319	22	12-28	82
300	12"	270	460	410	370	24,5	12-28	112
350	14"	290	520	470	429	26,5	16-28	190
400	16"	310	580	525	480	28	16-30	251
450	18"	330	640	585	550	28	20-30	320
500	20"	350	715	650	610	30	20-33	394
600	24"	390	840	770	725	32	20-36	580

Materials

No.	DESCRIPTION	MATERIAL	STANDARD
1	Body	Ductile Iron	EN-GJS-500-10
2	Wedge	DI+EPDM	EN-GJS-500-10
3	Stem nut	Brass	-
4	Stem	Stainless Steel	AISI SS420/SS316
5	Bonnet Gasket	EPDM	EPDM
6	Bonnet	Ductile Iron	EN-GJS-500-10
7	Handwheel	Ductile Iron	EN-GJS-500-10
8	Anti Dust Ring	EPDM	EPDM
9	Locking Nut	Brass	-
10	Sealing Ring	EPDM	EPDM
11	O Ring	EPDM	-
12	Positioning Ring	Brass	-



All data, descriptions and pictures contained in this leaflet may be subject to change without prior notice.

European Casting Industry Srl | Via Lazzaretto, 11 | 20124 Milan MI, Italia | P.Iva: 03228761205 | www.ecivalve.it | info@ecivalve.it